


Calculation formula for wind power load of communication base station

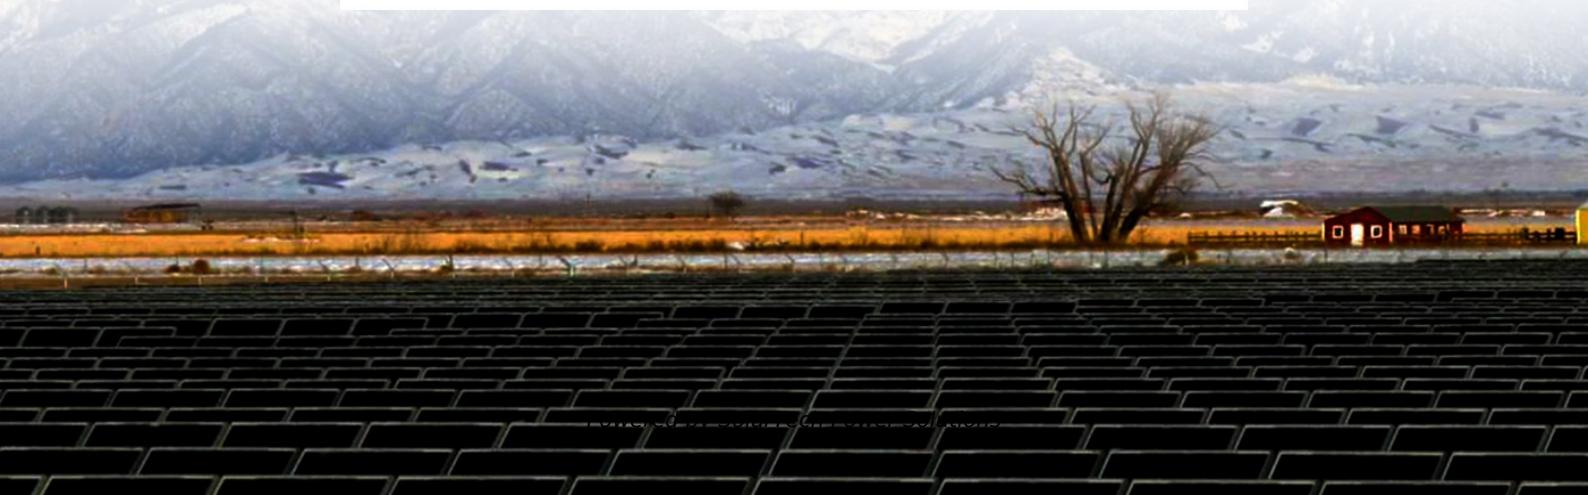

Overview

Wind Load Calculation Wind load is calculated using the following equation: $F_w = 1/2 C_d \rho A \lambda^2 V^2$ Where:

- F_w = Force due to wind (lbf, N)
- ρ = Air Density (.075lb/ft³, 1.22 kg/m³)
- C_d = Profile Drag Coefficient (from text or experimental data)
- λ = Length/Width Aspect Ratio Correction Factor
- V = Wind Velocity (ft/s, m/s)
- A = Cross Sectional Area Normal to wind direction (length*width) (ft², m²)

Table 1.

Calculation formula for wind power load of communication base sta

Contact Us

For catalog requests, pricing, or partnerships, please visit:
<https://zegrzynek.pl>